

650V/8A

SiC Schottky Barrier Diode

Characteristic


- Zero Reverse Recovery Current
- Positive temperature coefficient
- Temperature-independent performance
- High-speed switching
- Low switching loss
- Low heat dissipation requirements

Application

- Switching power supply
- Power factor correction
- Motor drive, traction
- Charging pile

Product Description

V_{RRM}	650	V
I_F(135°C)	14	A
Q_C	22	nC

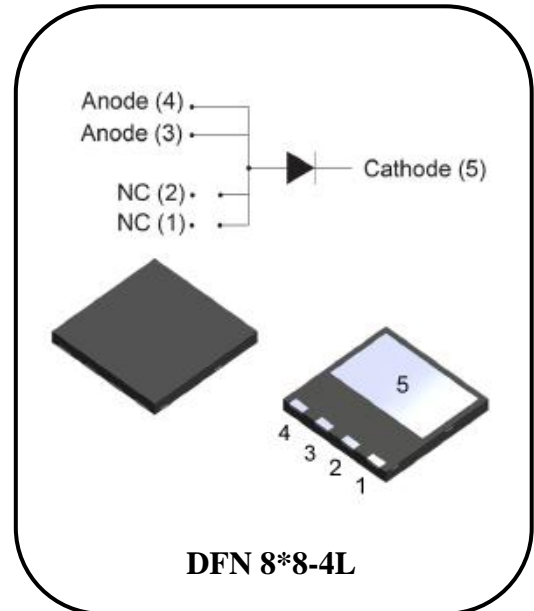

Device	Package	Marking
SDS065J008S3	DFN 8*8-4L	DS065008S3

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit	Test Conditions
Reverse voltage (Repetitive peak)	V _{RRM}	650	V	T _C =25°C
Reverse Voltage (Surge peak)	V _{RSM}	650		T _C =25°C
Reverse voltage (DC)	V _{DC}	650		T _C =25°C
Continuous forward current	I _F	29	A	T _C =25°C
		14		T _C =135°C
		8		T _C =155°C
Surge non-repetitive forward current	I _{FSM}	65	A	T _C =25°C, tp=10ms, half Sine Pulse
Repetitive Peak Forward Surge Current	I _{FRM}	39	A	T _C =25°C, tp=10ms, half Sine Wave D=0.1
Total power dissipation	P _{TOT}	125	W	T _C =25°C
i ² t value	∫i ² dt	21	A ² s	T _C =25°C, tp=10ms
Operating temperature	T _J	-55~175	°C	
storage temperature	T _{stg}	-55~175	°C	

Thermal Characteristics

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Thermal resistance	$R_{th(j-c)}$	/	1.05	/	$^{\circ}\text{C}/\text{W}$	

Electrical Characteristics $T_J=25^{\circ}\text{C}$

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
DC blocking voltage	V_{DC}	650	/	/	V	$I_R=100\ \mu\text{A}$
Forward voltage	V_F	/	1.30	1.50	V	$I_F=8\text{A}, T_J=25^{\circ}\text{C}$
		/	1.55	1.80		$I_F=8\text{A}, T_J=175^{\circ}\text{C}$
Reverse current	I_R	/	1	24	μA	$V_R=650\text{V}, T_J=25^{\circ}\text{C}$
		/	2	64		$V_R=650\text{V}, T_J=175^{\circ}\text{C}$
Total capacitance	C	/	395	/	pF	$V_R=0\text{V}, f=1\text{MHz}$
		/	42	/		$V_R=200\text{V}, f=1\text{MHz}$
		/	34	/		$V_R=400\text{V}, f=1\text{MHz}$
Total capacitive charge	Q_C	/	22	/	nC	$V_R=400\text{V}$
Capacitance Stored Energy	E_C	/	3.3	/	μJ	$V_R=400\text{V}$

Typical Electrical Characteristics Curves

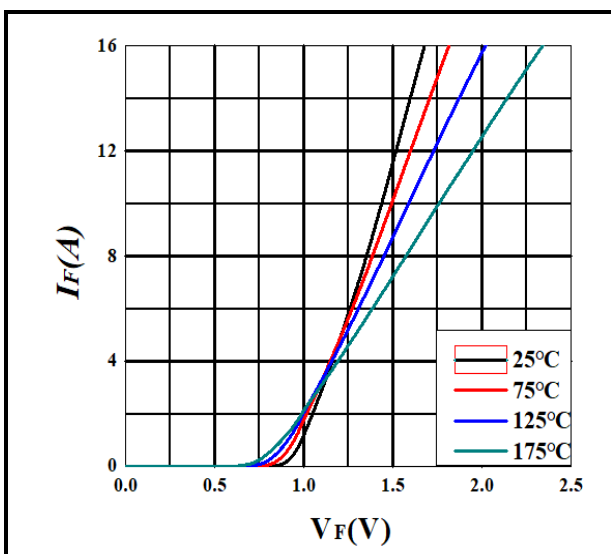


Figure 1. Forward Characteristics

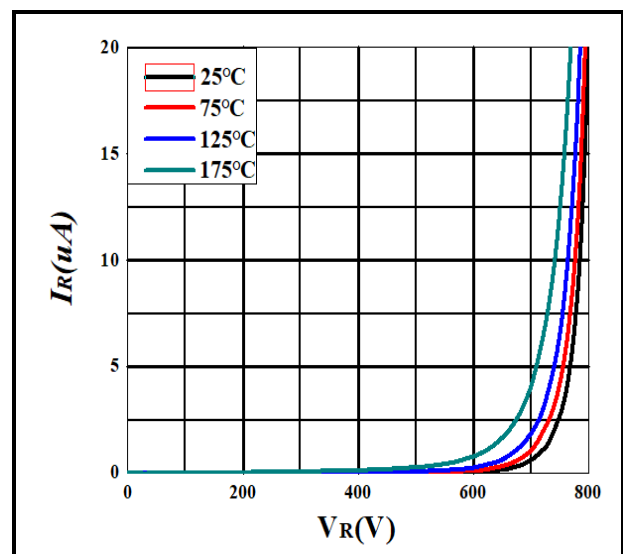


Figure 2. Reverse Characteristics

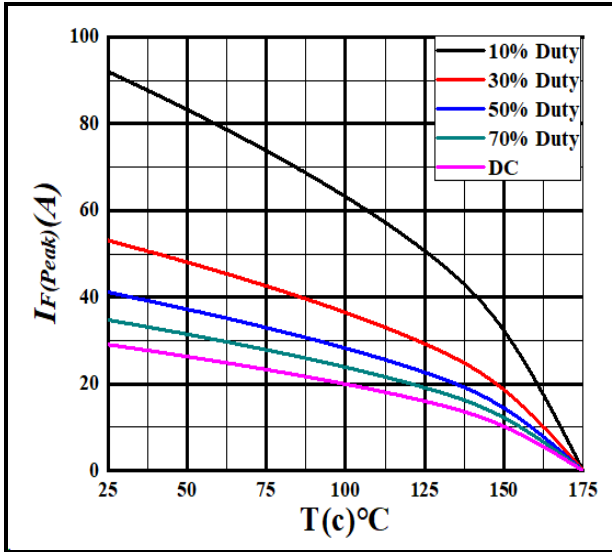


Figure 3. Current Derating

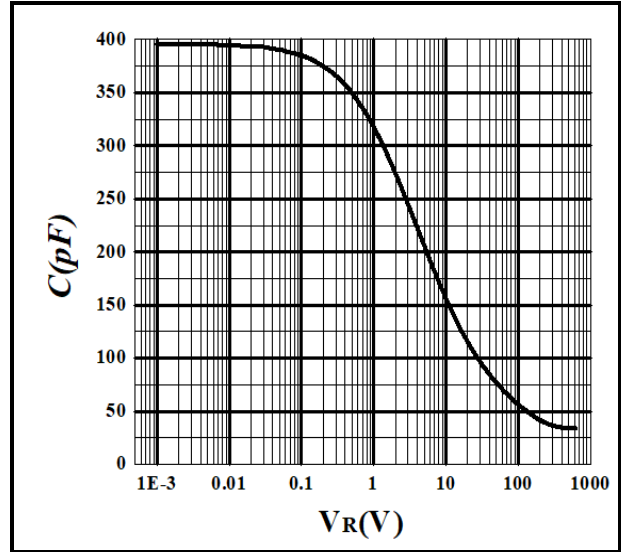


Figure 4. Capacitance vs. Reverse Voltage

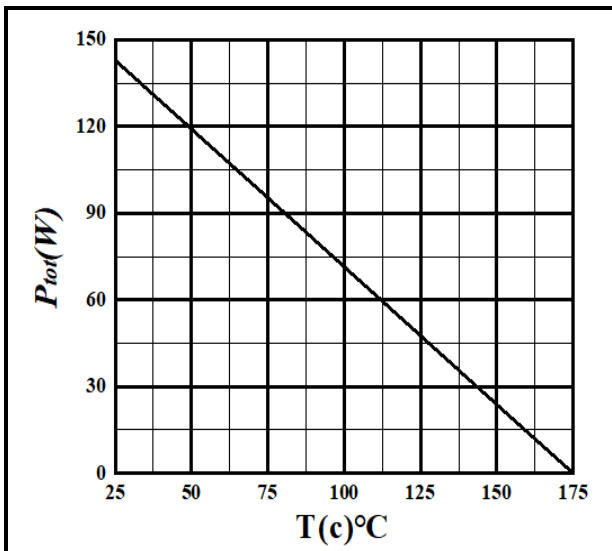


Figure 5. Power Derating

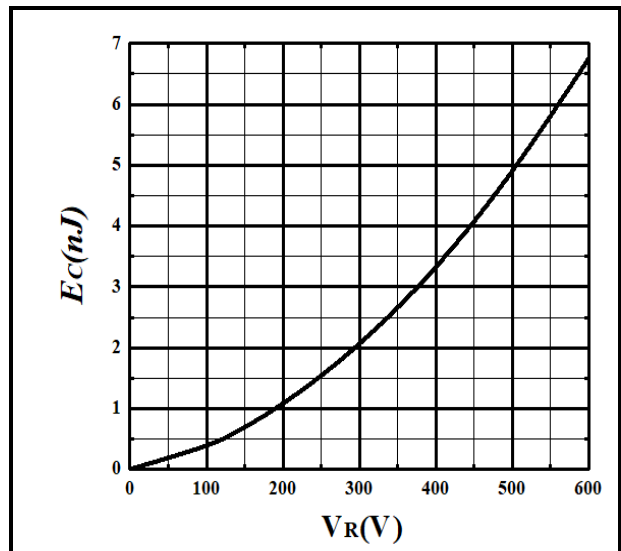


Figure 6. Capacitance Stored Energy


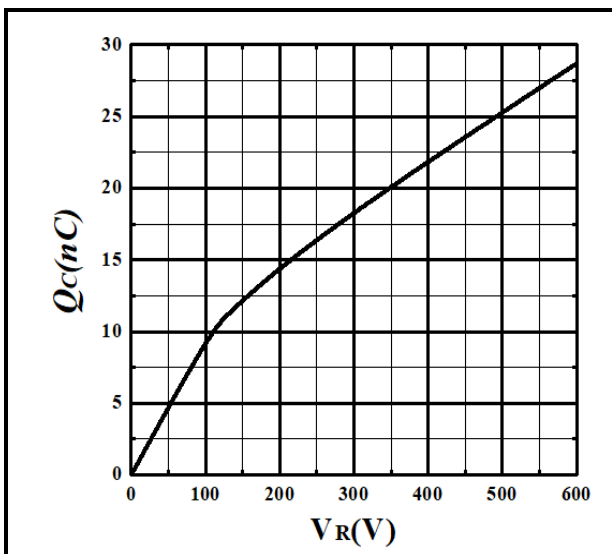


Figure 7. Total Capacitance Charge vs. Reverse Voltage

Package

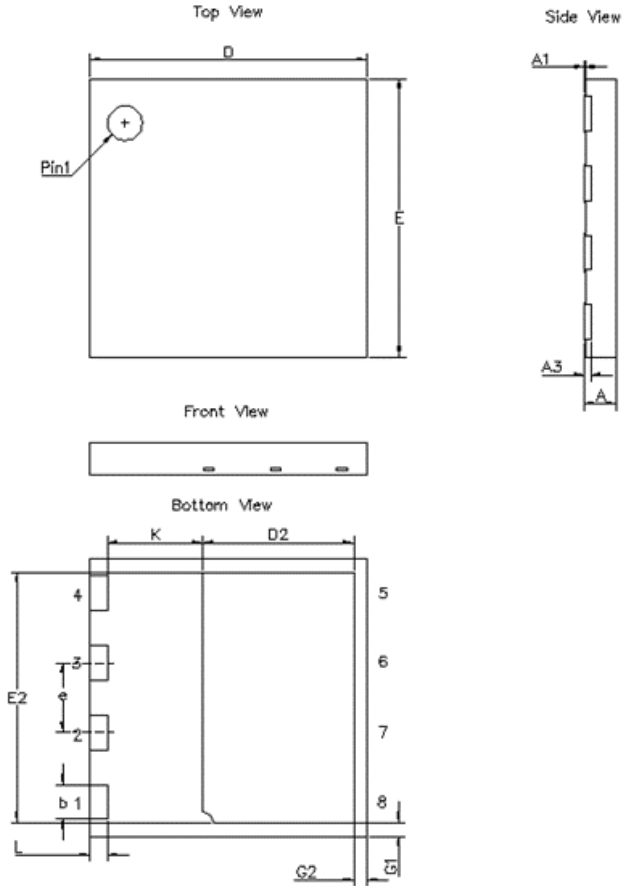

Dimension unit: [mm]			
SYMBOL	MIN	NOM	MAX
A	0.8	0.9	1
A1	0	0.02	0.05
A3	0.203REF		
b	0.9	1	1.1
D	7.9	8	8.1
E	7.9	8	8.1
D2	4.26	4.36	4.46
E2	7.1	7.2	7.3
e	1.9	2	2.1
K	2.65	2.75	2.85
L	0.4	0.5	0.6
G1	0.3	0.4	0.5
G2	0.3	0.4	0.5

Ordering information

Part Number	SDS065J008S3-ISBRH
Package	DFN 8*8-4L
Unit Quantity	3000 EA
Packing Type	Reel
RoHS	Yes