

650V/20A

SiC Schottky Barrier Diode

Characteristic


- Zero Reverse Recovery Current
- Positive temperature coefficient
- Temperature-independent performance
- High-speed switching
- Low switching loss
- Low heat dissipation requirements

Application

- Switching power supply
- Power factor correction
- Motor drive, traction
- Charging pile

Product Description

V_{RRM}	650	V
$I_F(135^{\circ}C)$	12*	A
Q_C	28*	nC

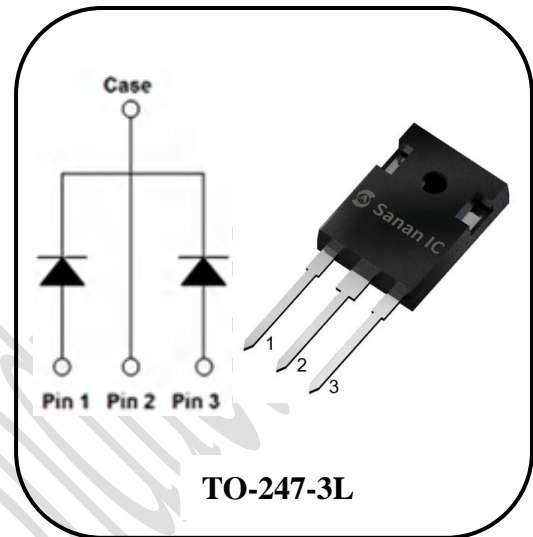

Device	Package	Marking
SDS065J020G2	TO-247-3L	DS065020G2

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit	Test Conditions
Reverse voltage (Repetitive peak)	V_{RRM}	650	V	$T_C=25^{\circ}C$
Reverse Voltage (Surge peak)	V_{RSM}	650		$T_C=25^{\circ}C$
Reverse voltage (DC)	V_{DC}	650		$T_C=25^{\circ}C$
Continuous forward current (Per Leg/Device)	I_F	25/50	A	$T_C=25^{\circ}C$
		12/24		$T_C=135^{\circ}C$
		10/20		$T_C=147^{\circ}C$
Surge non-repetitive forward current	I_{FSM}	80*	A	$T_C=25^{\circ}C, t_p=10ms, half\ Sine\ Pulse$
Repetitive Peak Forward Surge Current	I_{FRM}	50*	A	$T_C=25^{\circ}C, t_p=10ms, half\ Sine\ Wave\ D=0.1$
Total power dissipation	P_{TOT}	91*	W	$T_C=25^{\circ}C$
i^2t value	$\int i^2 dt$	32*	A^2s	$T_C=25^{\circ}C, t_p=10ms$
Operating temperature	T_j	-55~175	$^{\circ}C$	
storage temperature	T_{stg}	-55~175	$^{\circ}C$	
Mounting Torque	M	1	Nm	M3 Screw

Thermal Characteristics

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
Thermal resistance	$R_{th(j-c)}$	/	1.65*/0.82**	/	°C/W	

** Per device * Per leg

Electrical Characteristics (Per Leg) $T_j=25^\circ\text{C}$

Parameter	Symbol	Values			Unit	Test Condition
		Min.	Typ.	Max.		
DC blocking voltage	V_{DC}	650	/	/	V	$I_R=100\ \mu\text{A}$
Forward voltage	V_F	/	1.45	1.70	V	$I_F=10\text{A}, T_j=25^\circ\text{C}$
		/	1.75	2.50		$I_F=10\text{A}, T_j=175^\circ\text{C}$
Reverse current	I_R	/	1	40	μA	$V_R=650\text{V}, T_j=25^\circ\text{C}$
		/	5	200		$V_R=650\text{V}, T_j=175^\circ\text{C}$
Total capacitance	C	/	534	/	pF	$V_R=0\text{V}, f=1\text{MHz}$
		/	53	/		$V_R=200\text{V}, f=1\text{MHz}$
		/	46	/		$V_R=400\text{V}, f=1\text{MHz}$
Total capacitive charge	Q_C	/	28	/	nC	$V_R=400\text{V}$
Capacitance Stored Energy	E_C	/	4.3	/	μJ	$V_R=400\text{V}$

Typical Electrical Characteristics Curves

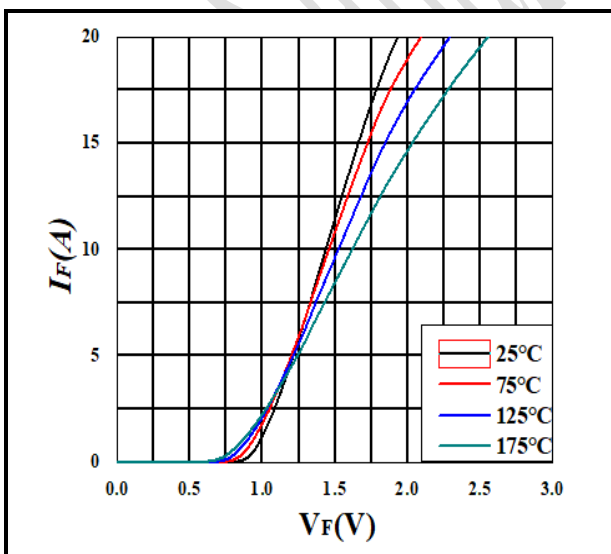


Figure 1. Forward Characteristics

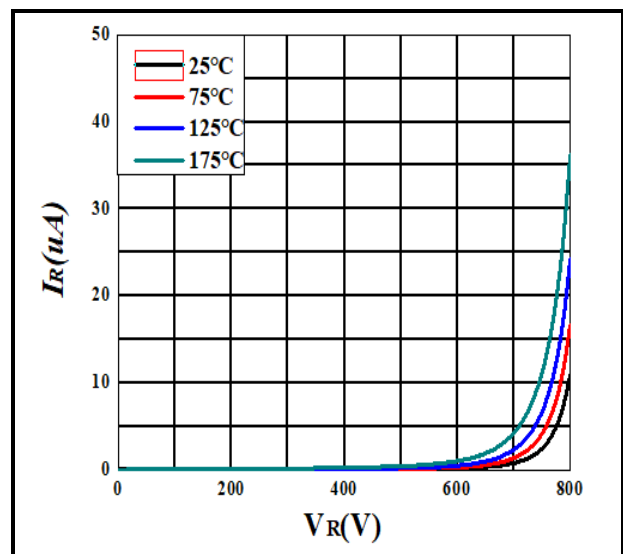


Figure 2. Reverse Characteristics

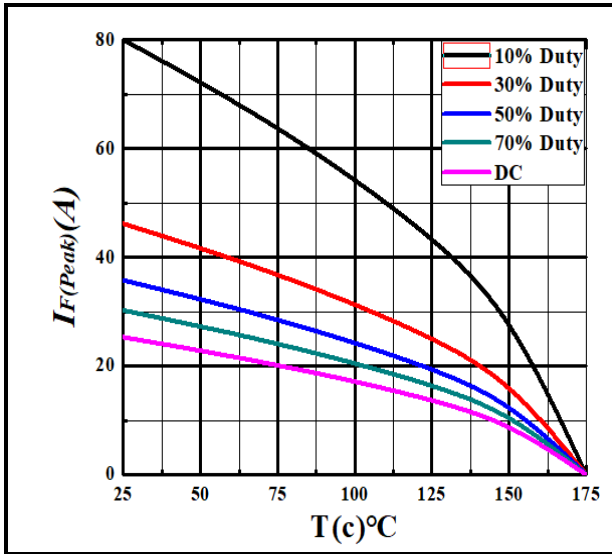


Figure 3. Current Derating

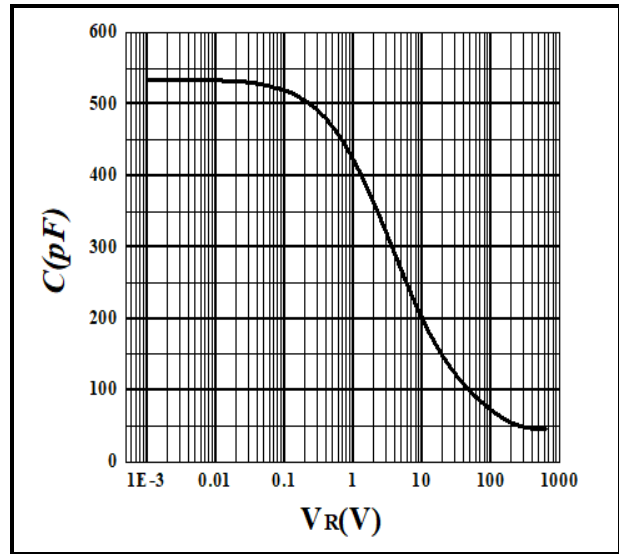


Figure 4. Capacitance vs. Reverse Voltage

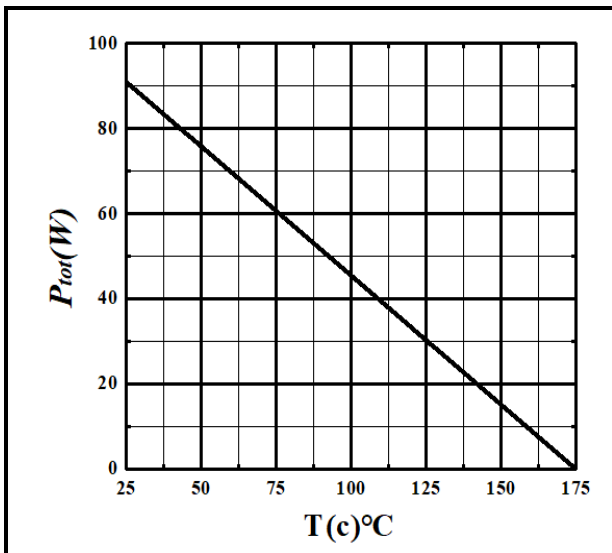


Figure 5. Power Derating

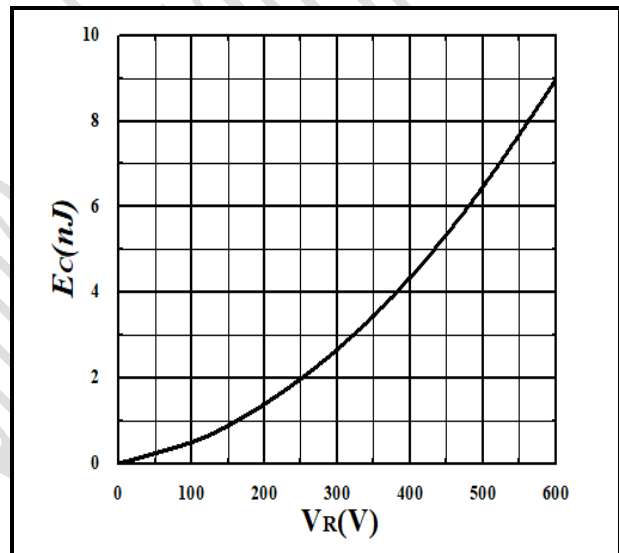


Figure 6. Capacitance Stored Energy

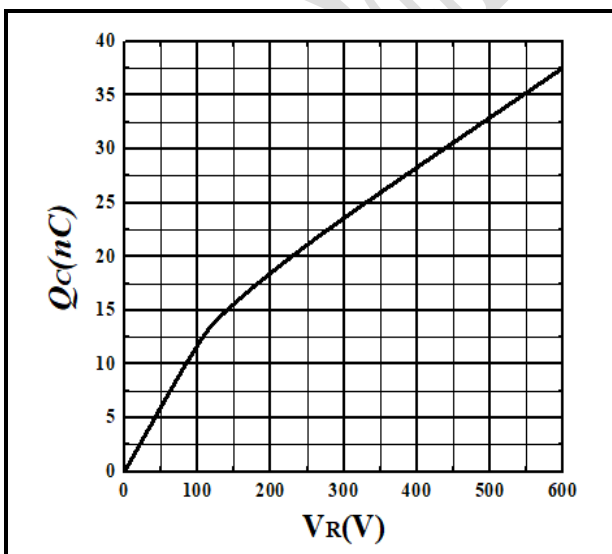


Figure 7. Total Capacitance Charge vs. Reverse Voltage

